


SKYTECH

Skytech Fire Ring System

Outdoor fire. Indoor easy.

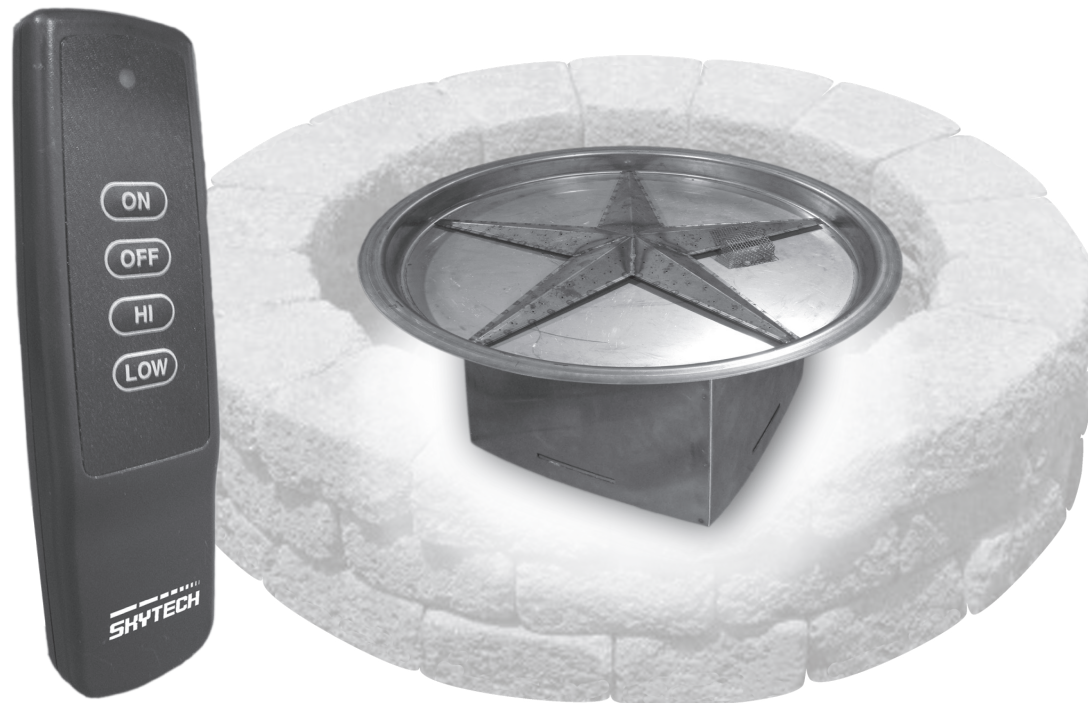

Features

- Fully Electronic Direct Spark gas valve with a 6 Volt operating module - battery operation
- Six-month all battery operation
- 12 feet of wiring makes junction box installation and relocation quick and hassle-free
- Standard remote control system and module included
- Remotely adjusts the flame height from High to Low
- Complete 19" and 25" round systems come with all the parts assembled for fast and easy installation (All systems are shipped set up for Natural gas, Propane (LP) conversion kit is available)
- Unique star burner creates perfect flame height and spread for a realistic effect
- Two additional wireless transmitters may be added to the standard remote control
- 120 Volt power option is available

Specifications

	<i>High BTUH's Natural/Propane(LP)</i>	<i>Low BTUH's Natural/Propane(LP)</i>
SFRS 19 DSI	80,000 BTUH's	50,000 BTUH's
SFRS 25 DSI	110,000 BTUH's	50,000 BTUH's

	<i>Natural Gas</i>	<i>(LP) Propane Gas</i>
Gas Inlet Pressure		
Min. Inlet	5.0" w.c.	11.0" w.c.
Max. Inlet	14.0" w.c.	14.0" w.c.

Firepit Basic Mounting Dimensions

MODEL:	SFRS19DSI	SFRS25DSI
INSTALL HEIGHT (MINIMUM)	18"	18"
INSTALL DIAMETER (MIN/MAX)	20" / 21"	26" / 27"
D1	19"	25"
D2	21.75"	27.75"
H1	2.5"	2.5"
H2	4.5"	4.5"
H3	6"	6"
W1	10.5"	10.5"

ALL DIMENSIONS ARE NOMINAL
UNLESS OTHERWISE NOTED

