

Wood Burning Fireplaces using 8DM venting system:  
 WRT/WCT2000  
 WRT/WCT3000 | WRE3000

Wood Burning Fireplaces using 12DM venting system:  
 WRT3500  
 WRT4000  
 WRT4500 | WRE4500  
 WRT6000 | WRE6000

Basic 8DM venting system:  
 F0895 12-8DM 12" Section Double Wall Pipe Snap Lock  
 F0896 18-8DM 18" Section Double Wall Pipe Snap Lock  
 F0897 24-8DM 24" Section Double Wall Pipe Snap Lock  
 F0898 36-8DM 36" Section Double Wall Pipe Snap Lock  
 F0899 48-8DM 48" Section Double Wall Pipe Snap Lock  
 F0900 30E-8DM 30 Degree Offset and Return  
 F0907 3600FS-8DM-1 1" Clearance Firestop Spacer  
 F0915 SC1-1 Storm Collar  
 F0916 RT-8DM Round Top with Mesh Screen  
 F0917 RTT-8DM \* Round Top with Slip Section & Mesh  
 F1091 AK4 4" Air Kit with Collar, Hood & 3' Flex

\*FLASHING (IF NEEDED)

F0908 V6FS-8DM \* Roof Flashing 0 to 6/12 Pitch (24" Base)  
 F0909 V6F-8DM \* Roof Flashing 0 to 6/12 Pitch (30" Base)  
 F0910 V12F-8DM \* Roof Flashing 6/12 to 12/12 Pitch

Basic 12DM venting system:

F0932 12-12DM 12" Section Double Wall Pipe Snap Lock  
 F0933 18-12DM 18" Section Double Wall Pipe Snap Lock  
 F0934 24-12DM 24" Section Double Wall Pipe Snap Lock  
 F0935 36-12DM 36" Section Double Wall Pipe Snap Lock  
 F0936 48-12DM 48" Section Double Wall Pipe Snap Lock  
 F0937 30E-12DM 30 Degree Offset and Return  
 F0940 FS-10 2" Clearance Firestop Spacer  
 F0946 SC2-1 Storm Collar  
 F0947 RLT-12D Round Top Termination with Louvered Screen  
 F1091 AK4 4" Air Kit with Collar, Hood & 3' Flex (typical use 2)

\*FLASHING (IF NEEDED)


F0942 V6F-10DM \* Roof Flashing 0 to 6/12 Pitch  
 F0943 V12F-10DM \* Roof Flashing 6/12 to 12/12 Pitch

\*Chimney chase pans provided by others

Quantities for pipe, firestops will vary based on installation  
 Please consult fireplace manual for installation instructions

Version 1.3 | Revision date 5/14/2019

**Superior**  
 FIREPLACES®

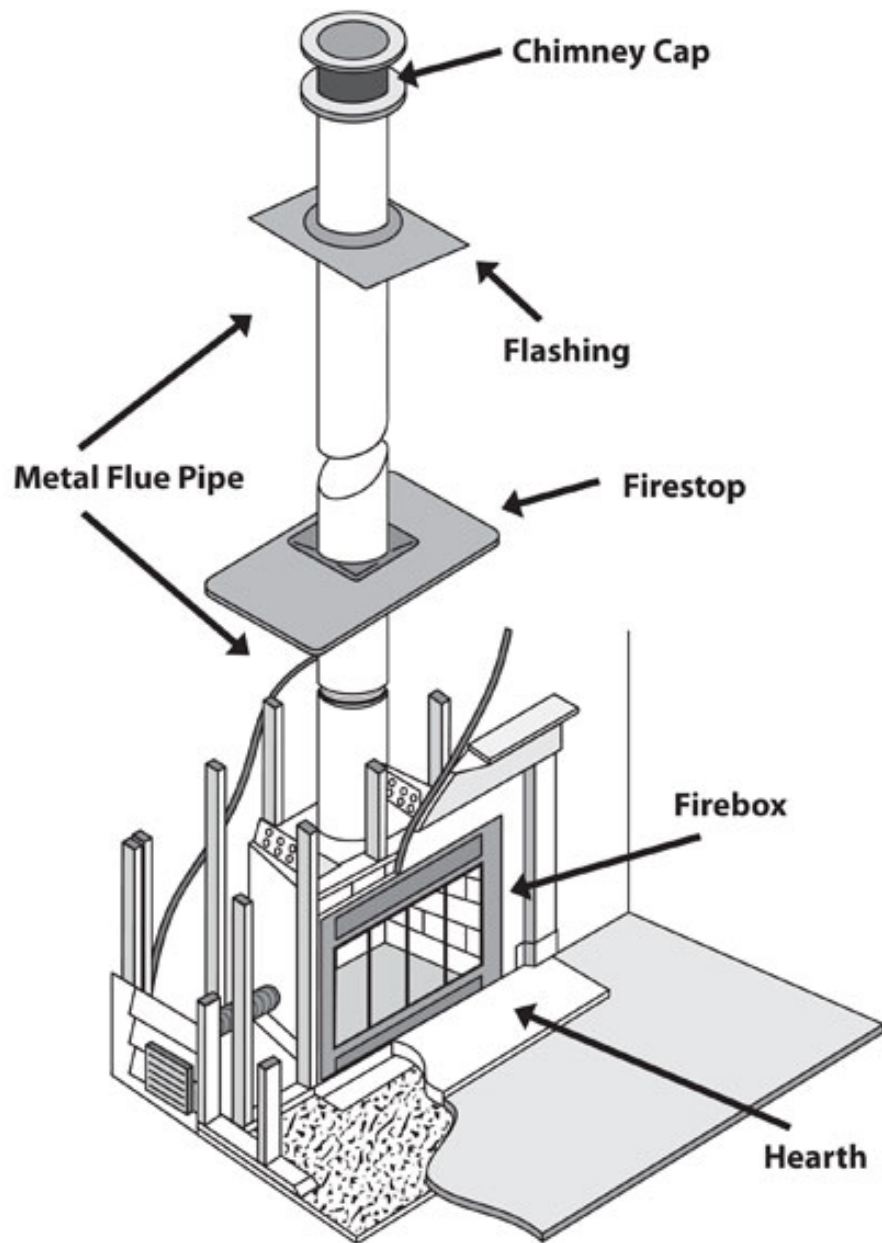

Wood Burning Fireplaces using 8DM venting system:  
 WRT/WCT2000  
 WRT/WCT3000 | WRE3000

Wood Burning Fireplaces using 12DM venting system:  
 WRT3500  
 WRT4000  
 WRT4500 | WRE4500  
 WRT6000 | WRE6000

Basic 8DM venting system:  
 F0895 12-8DM 12" Section Double Wall Pipe Snap Lock  
 F0896 18-8DM 18" Section Double Wall Pipe Snap Lock  
 F0897 24-8DM 24" Section Double Wall Pipe Snap Lock  
 F0898 36-8DM 36" Section Double Wall Pipe Snap Lock  
 F0899 48-8DM 48" Section Double Wall Pipe Snap Lock  
 F0900 30E-8DM 30 Degree Offset and Return  
 F0907 3600FS-8DM-1 1" Clearance Firestop Spacer  
 F0915 SC1-1 Storm Collar  
 F0916 RT-8DM Round Top with Mesh Screen  
 F0917 RTT-8DM \* Round Top with Slip Section & Mesh  
 F1091 AK4 4" Air Kit with Collar, Hood & 3' Flex


\*FLASHING (IF NEEDED)  
 F0908 V6FS-8DM \* Roof Flashing 0 to 6/12 Pitch (24" Base)  
 F0909 V6F-8DM \* Roof Flashing 0 to 6/12 Pitch (30" Base)  
 F0910 V12F-8DM \* Roof Flashing 6/12 to 12/12 Pitch

Basic 12DM venting system:  
 F0932 12-12DM 12" Section Double Wall Pipe Snap Lock  
 F0933 18-12DM 18" Section Double Wall Pipe Snap Lock  
 F0934 24-12DM 24" Section Double Wall Pipe Snap Lock  
 F0935 36-12DM 36" Section Double Wall Pipe Snap Lock  
 F0936 48-12DM 48" Section Double Wall Pipe Snap Lock  
 F0937 30E-12DM 30 Degree Offset and Return  
 F0940 FS-10 2" Clearance Firestop Spacer  
 F0946 SC2-1 Storm Collar  
 F0947 RLT-12D Round Top Termination with Louvered Screen  
 F1091 AK4 4" Air Kit with Collar, Hood & 3' Flex (typical use 2)

\*FLASHING (IF NEEDED)  
 F0942 V6F-10DM \* Roof Flashing 0 to 6/12 Pitch  
 F0943 V12F-10DM \* Roof Flashing 6/12 to 12/12 Pitch

\*Chimney chase pans provided by others  
 Quantities for pipe, firestops will vary based on installation  
 Please consult fireplace manual for installation instructions



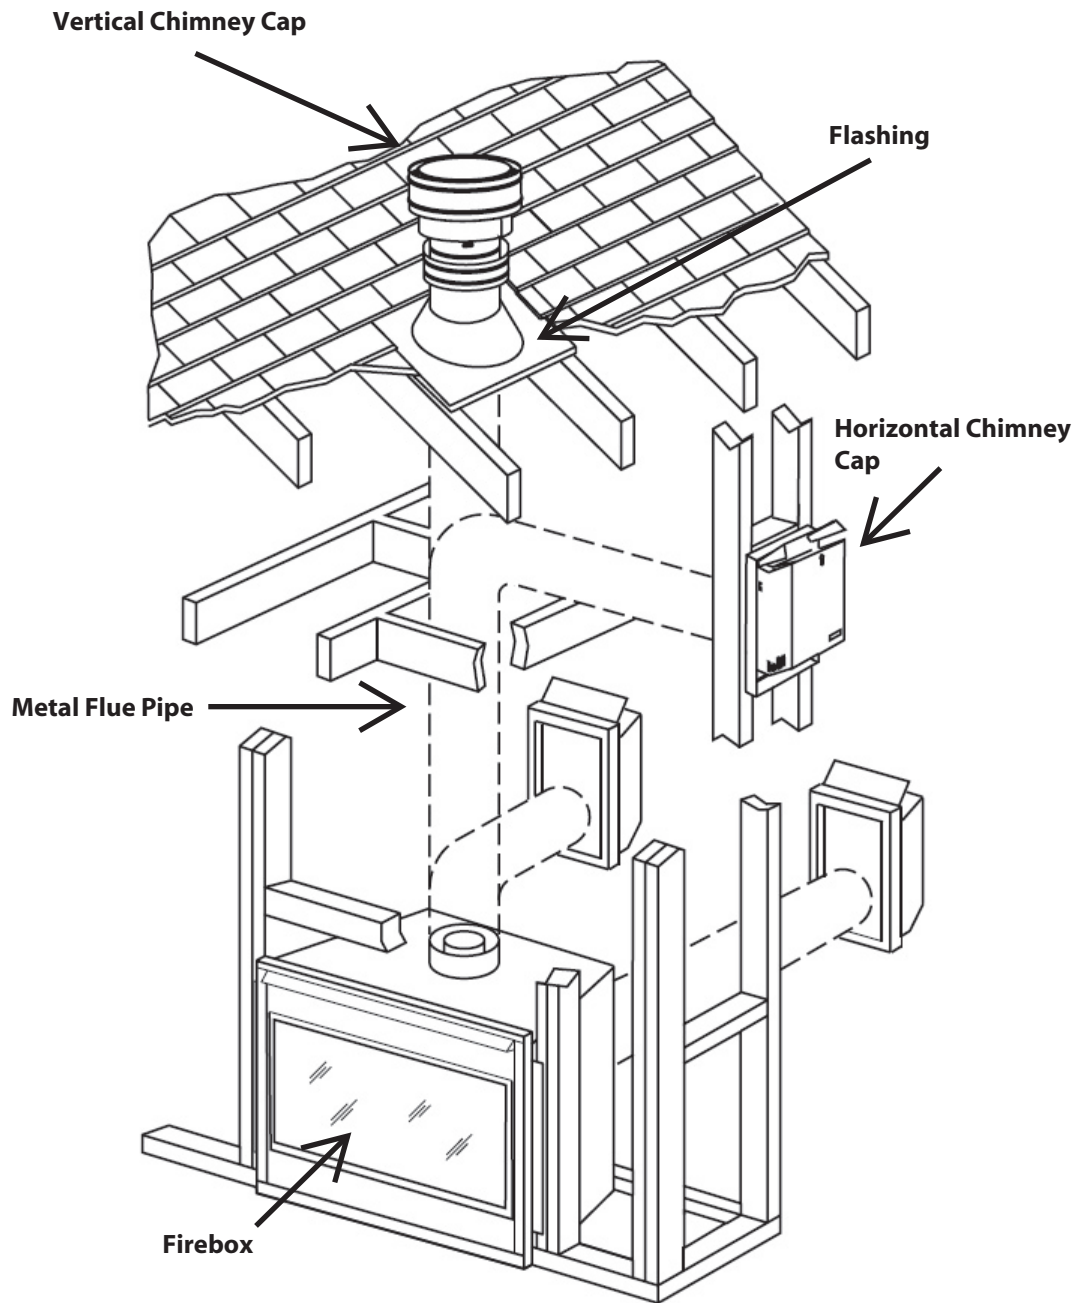

Direct Vent fireplaces using 4.5/7.5 venting system:

DRT2000 | DRC2000  
 DRT3000 | DRC3000  
 DRT3500 | DRC3500  
 DRT35ST | DRT35PF | DRT40ST | DRT40PF | DRT40CR/L  
 DRT4040/45  
 DRT4200  
 DRT6300 | DRC6300 | DRT63ST \*Power Vented  
 DRL3000  
 DRL6500

Basic 4.5/7.5 Venting System:

77L70 SV4.5L6 6" Rigid DV Vent  
 77L71 SV4.5L12 12" Rigid DV Vent  
 77L72 SV4.5L24 24" Rigid DV Vent  
 77L73 SV4.5L36 36" Rigid DV Vent  
 77L74 SV4.5L48 48" Rigid DV Vent  
 77L75 SV4.5LA Adjustable Length Slip Section (2" - 7.5") - rigid  
 77L76 SV4.5E45 45 Degree Elbow  
 77L77 SV4.5E90 90 Degree Elbow  
 77L81 SV4.5SC6 Storm Collars (6 pieces)  
 H6183 SV4.5HF5 Horizontal Spacer, Rigid, each  
 H2246 SV4.5HF - 10 Horizontal Firestop (Rigid) - 10 Pack  
 F2567 SV4.5VFS Vertical Firestop (Rigid), each  
 H2247 SV4.5VF - 10 Vertical Firestop (Rigid) - 10 Pack.  
 H3907 SV4.5RSA Attic Insulation Radiation Shield

Termination Kits (Includes termination, adaptor and firestop):

H1968 SV4.5HT-2 Horizontal Termination Kit  
 H8914 SV4.5TK90HT2 Horizontal Termination Kit HT2 Includes SV4.5 90 Elbow  
 H8915 SV4.5TK90SS Horizontal Termination Kit, Small Square, Includes SV4.5 90 Elbow  
 H2152 SV4.5GV-1 Vertical Termination, High Wind  
 F2568 SV4.5GV-1-SC Vertical Termination, with Storm Collar


\*FLASHING (IF NEEDED)

77L78 SV4.5F Roof Flashing - Fla  
 77L79 SV4.5FA Roof Flashing 1/12 - 7/12 Pitch  
 77L80 SV4.5FB Roof Flashing 7/12 - 12/12 Pitch

\*Chimney chase pans provided by others

Quantities for pipe, firestops will vary base on installation  
 Please consult fireplace manual for installation instructions



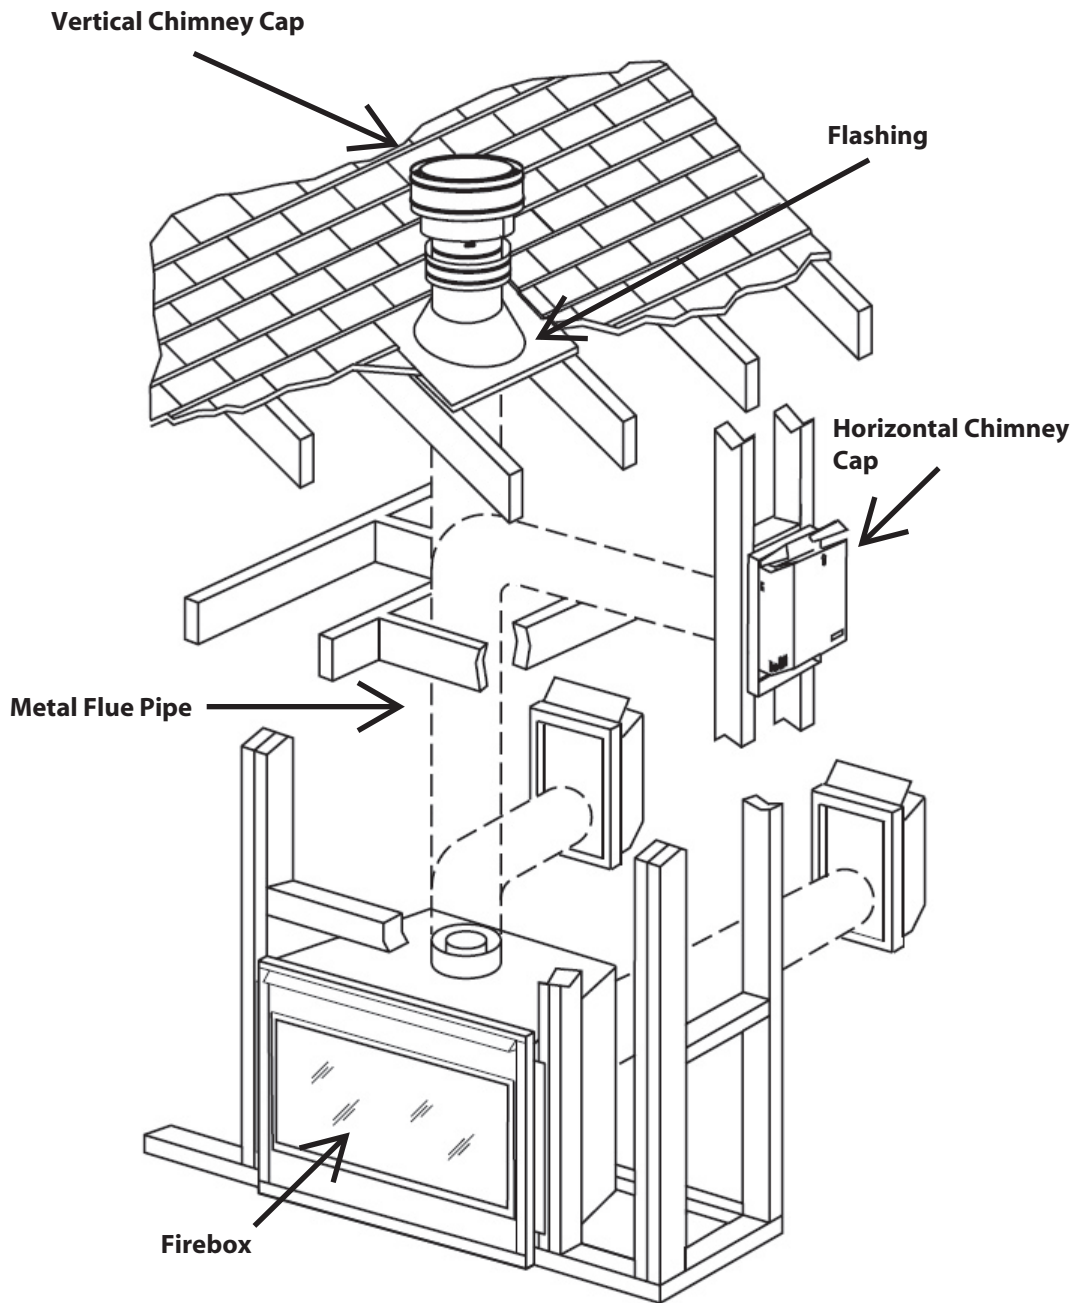

Direct vent fireplaces using 8/11 venting system:  
 DRT6300 | DRC6300  
 DRT63ST | DRC6300


Basic 8/11 Venting System:  
 H2250 SV8L6 6" Rigid DV Vent  
 H2251 SV8L12 12" Rigid DV Vent  
 H2252 SV8L24 24" Rigid DV Vent  
 H2253 SV8L36 Rigid DV Vent  
 H2254 SV8L48 Rigid DV Vent  
 H2255 SV8LA Telescopic Section  
 F3721 SV8E45C 45 Degree Elbow - Corrugated  
 F3720 SV8E90C 90 Degree Elbow - Corrugated

H2260 SV8HF Horizontal Firestop  
 H2261 SV8BF Vertical Firestop  
 H3237 SV8SC6 Storm Collar, 6 Pack  
 H3908 SV8ARSA Attic Insulation Radiation Shield  
 H2265 SV8VTR Vertical Termination  
 H2266 SV8HTR Horizontal Termination

\*Flashing (if needed):  
 H2258 SV8FA Roof Flashing 1/12-7/12  
 H2259 SV8FB Roof Flashing 7/12-12/12  
 H3236 SV8F Roof Flashing, Flat

\*Chimney chase pans provided by others  
 Quantities for pipe, firestops will vary base on installation  
 Please consult fireplace manual for installation instructions



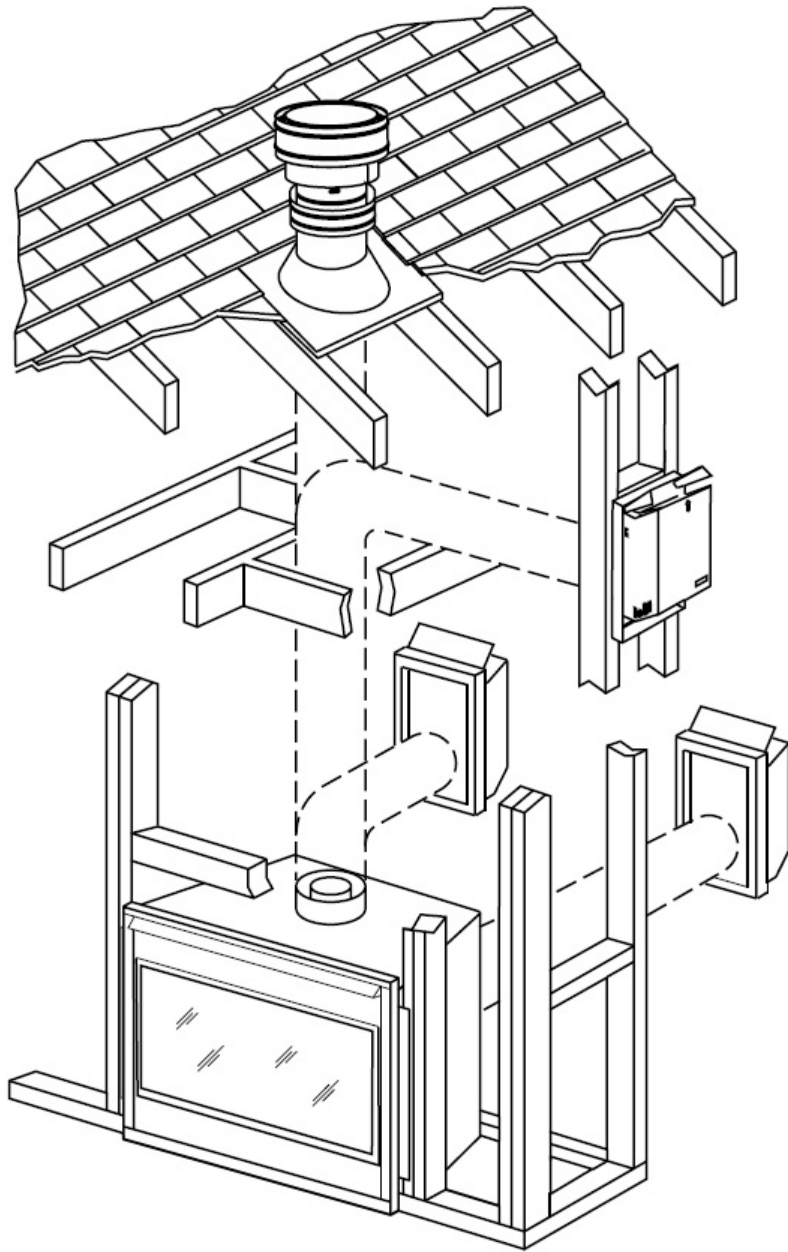

Direct Vent freplaces using 5/8 venting system:

DRL4060

Basic 5/8 direct venting system.  
 Pipe provided only by Metal-Fab Inc.  
[www.mtlfab.com](http://www.mtlfab.com):


- J2209 P58-6 6" Section Double Wall Pipe
- J2201 P58-12 12" Section Double Wall Pipe
- J2203 P58-24 24" Section Double Wall Pipe
- J2205 P58-36 36" Section Double Wall Pipe
- J2207 P58-48 48" Section Double Wall Pipe
- J2082 PA58-712 Adjustable 7"- 12" Section Double Wall Pipe
- J2041 OSR58-30 30 degree Offset and Return
- J0661 E58-45 45 degree Elbow
- J0663 E58-90 90 degree Elbow
- J1504 HTS-58 Horizontal Square Termination
- J3190 VT-58 Vertical Round Termination
- J1484 HHTK-58 Horizontal Round Hi-Wind Termination Kit
- J1501 HTKS-58 Horizontal Square Termination Kit
- J2300 SC-58 Storm Collar
- J3479 WF-58 Wall Firestop
- J0953 FP-58 Firestop Plate

- \*Flashing (if needed):
- J2251 RF-58-6 Roof Flashing - 0 to 6/12 Pitch
- J2249 RF-58-12 Roof Flashing - 6/12 to 12/12 Pitch

\*Chimney chase pans provided by others  
 Quantities for pipe, firestops will vary base on installation  
 Please consult fireplace manual for installation instructions



## CHIMNEY INSTALLATION

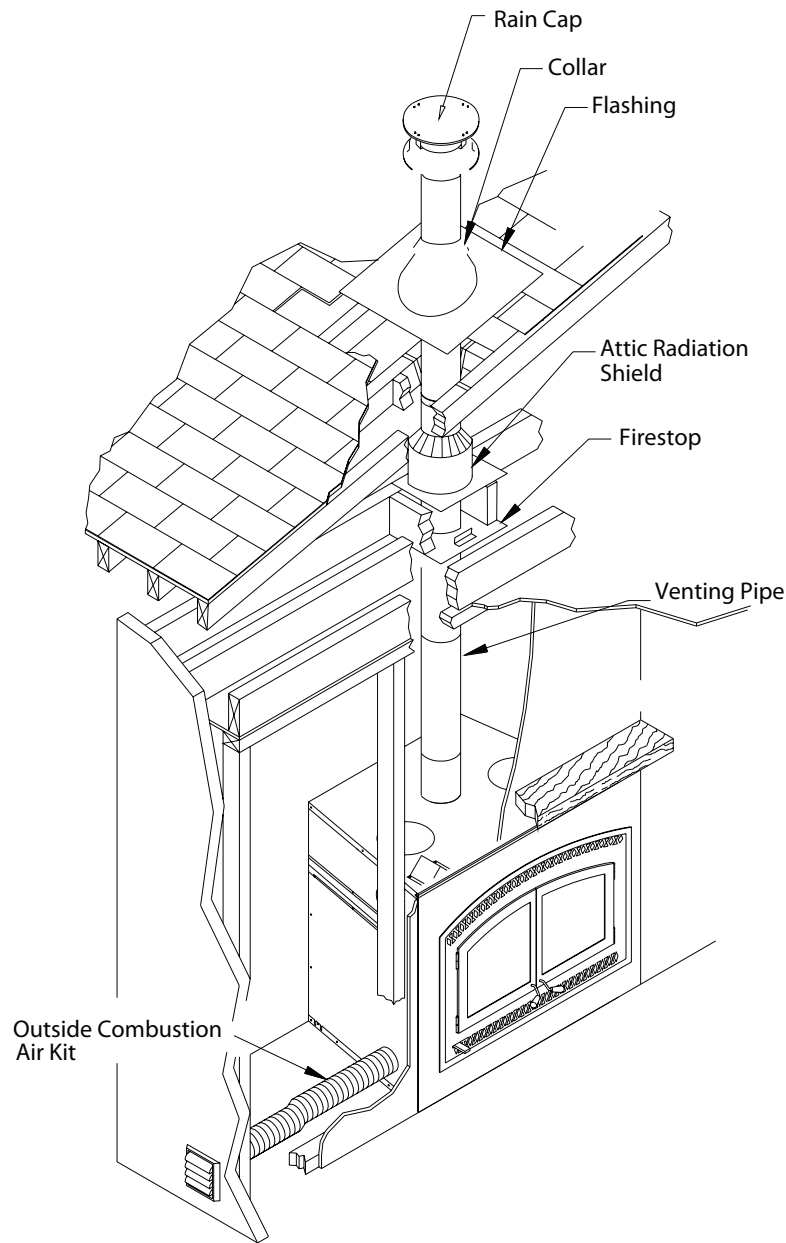

High Efficiency Wood Burning Fireplaces using  
6" insulated venting system:

WRT3920  
WRT4820  
WCT4820  
WCT6820

Basic 6" insulated venting system:

F3966 | 6SPS6 | 6" SS (2pk) Chimney Length  
F3967 | 6SPS12 | 12" SS (2pk) Chimney Length  
F3968 | 6SPS18 | 18" SS (2pk) Chimney Length  
F3969 | 6SPS24 | 24" SS Chimney Length  
F3970 | 6SPS36 | 36" SS Chimney Length  
F3971 | 6SPS48 | 48" SS Chimney Length  
F3972 | 6SPSE15 | 15 Degree SS Elbow  
F3973 | 6SPE30 | 30 Degree SS Elbow

F3974 | 6SPFS | Firestop Spacer  
F3975 | 6SPIS | Attic Insulation Shield

F3976 | 6SFF | Flat Flashing  
F3977 | 6SPF5 | 2/12 - 5/12 Flashing  
F3978 | 6SPF10 | 6/12 - 10/12 Flashing

F3980 | 6SPRB | Roof Brace  
F3981 | 6SPSC | Storm Collar  
F3982 | 6SPC | Round Cap with Spark Arrester  
F3983 | 6SPWF | Non-Insulated Wall Firestop  
F3984 | 6SPAS | Adjustable Support  
F3985 | 6SPWB | Wall Band  
F3986 | 6SPSB | Support Band


6" Wood-Burning Chimney Components for Freestanding Stoves

F3987 | 6SPBSCS | Black Standard Ceiling Support  
F3988 | 6SPBCCS | Black Cathedral Ceiling Support  
F3989 | 6SPBTC | Black Trim Collar  
F3990 | 6SPBSWA | Black Single Wall Pipe Adapter  
F3991 | 6SPST | Tee SS (Tee Cap Included)  
F3992 | 6SPTS | Tee Support  
F3993 | 6SPATS | Adjustable Tee Support  
F3983 | 6SPWF | Non-Insulated Wall Firestop  
F3984 | 6SPAS | Adjustable Support  
F3985 | 6SPWB | Wall Band  
F3986 | 6SPSB | Support Band

\*Chimney chase pans provided by others  
Quantities for pipe, firestops will vary base on installation  
Please consult fireplace manual for installation instructions

**Superior**  
FIREPLACES®

## CHIMNEY INSTALLATION

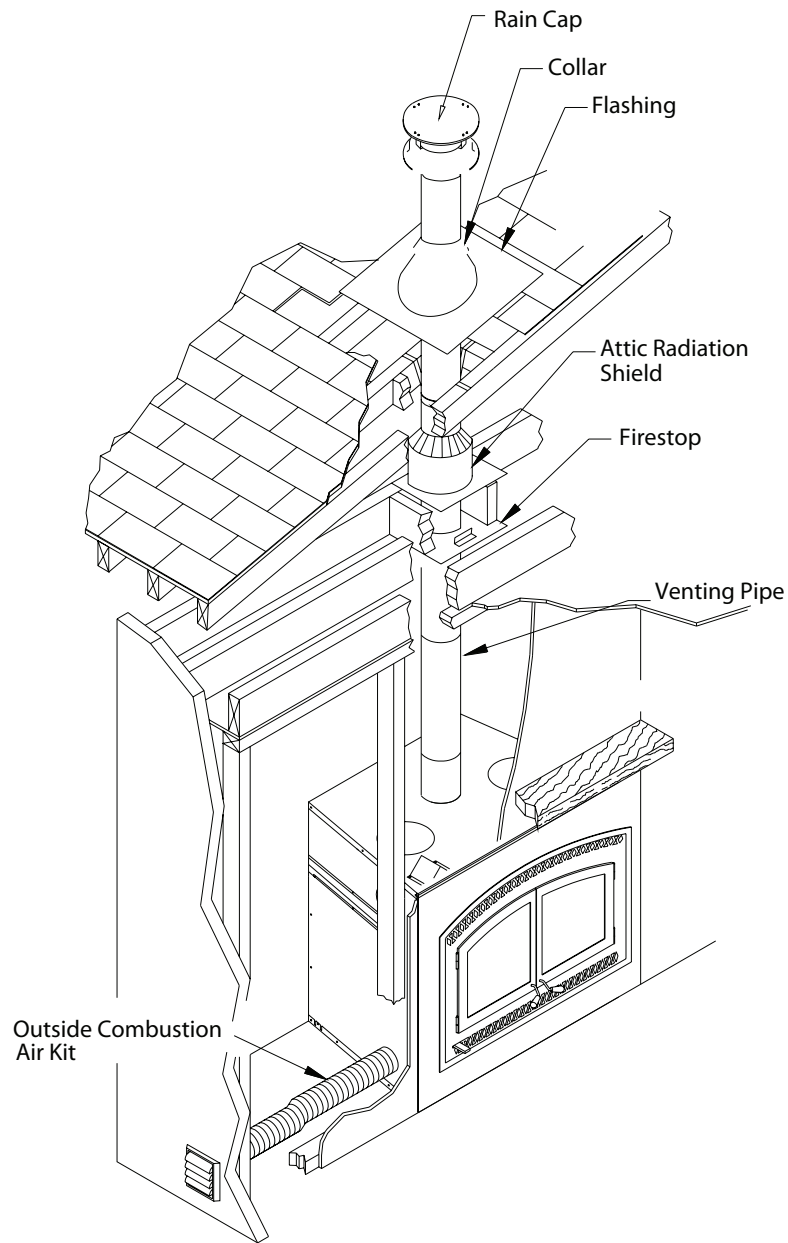

High Efficiency Wood Burning Fireplaces using  
7" insulated venting system:

WRT4826  
WCT6940

Basic 7" insulated venting system:

F3994 | 7SPS6 | (2pk) 6" SS Chimney Length  
F3995 | 7SPS12 | (2pk) 12" SS Chimney Length  
F3996 | 7SPS18 | (2pk) 18" SS Chimney Length  
F3997 | 7SPS24 | 24" SS Chimney Length  
F3998 | 7SPS36 | 36" SS Chimney Length  
F3999 | 7SPS48 | 48" SS Chimney Length  
F4000 | 7SPSE15 | 15 degree SS Elbow  
F4001 | 7SPSE30 | 30 degree SS Elbow


F4002 | 7SPFS | Firestop Spacer  
F4003 | 7SPIS | Attic Insulation Shield

F4004 | 7SPFF | Flat Flashing  
F4005 | 7SPF5 | 2/12 - 5/12 Flashing  
F4006 | 7SPF10 | 6/12 - 10/12 Flashing

F4008 | 7SPRB | Roof Brace  
F4009 | 7SPSC | Storm Collar  
F4010 | 7SPC | Round Cap with Spark Arrestor  
F4011 | 7SPWF | Non-Insulated Wall Firestop  
F4012 | 7SPAS | Adjustable Support  
F4013 | 7SPWB | Wall Band  
F4014 | 7SPSB | Support Band

\*Chimney chase pans provided by others  
Quantities for pipe, firestops will vary based on installation  
Please consult fireplace manual for installation instructions



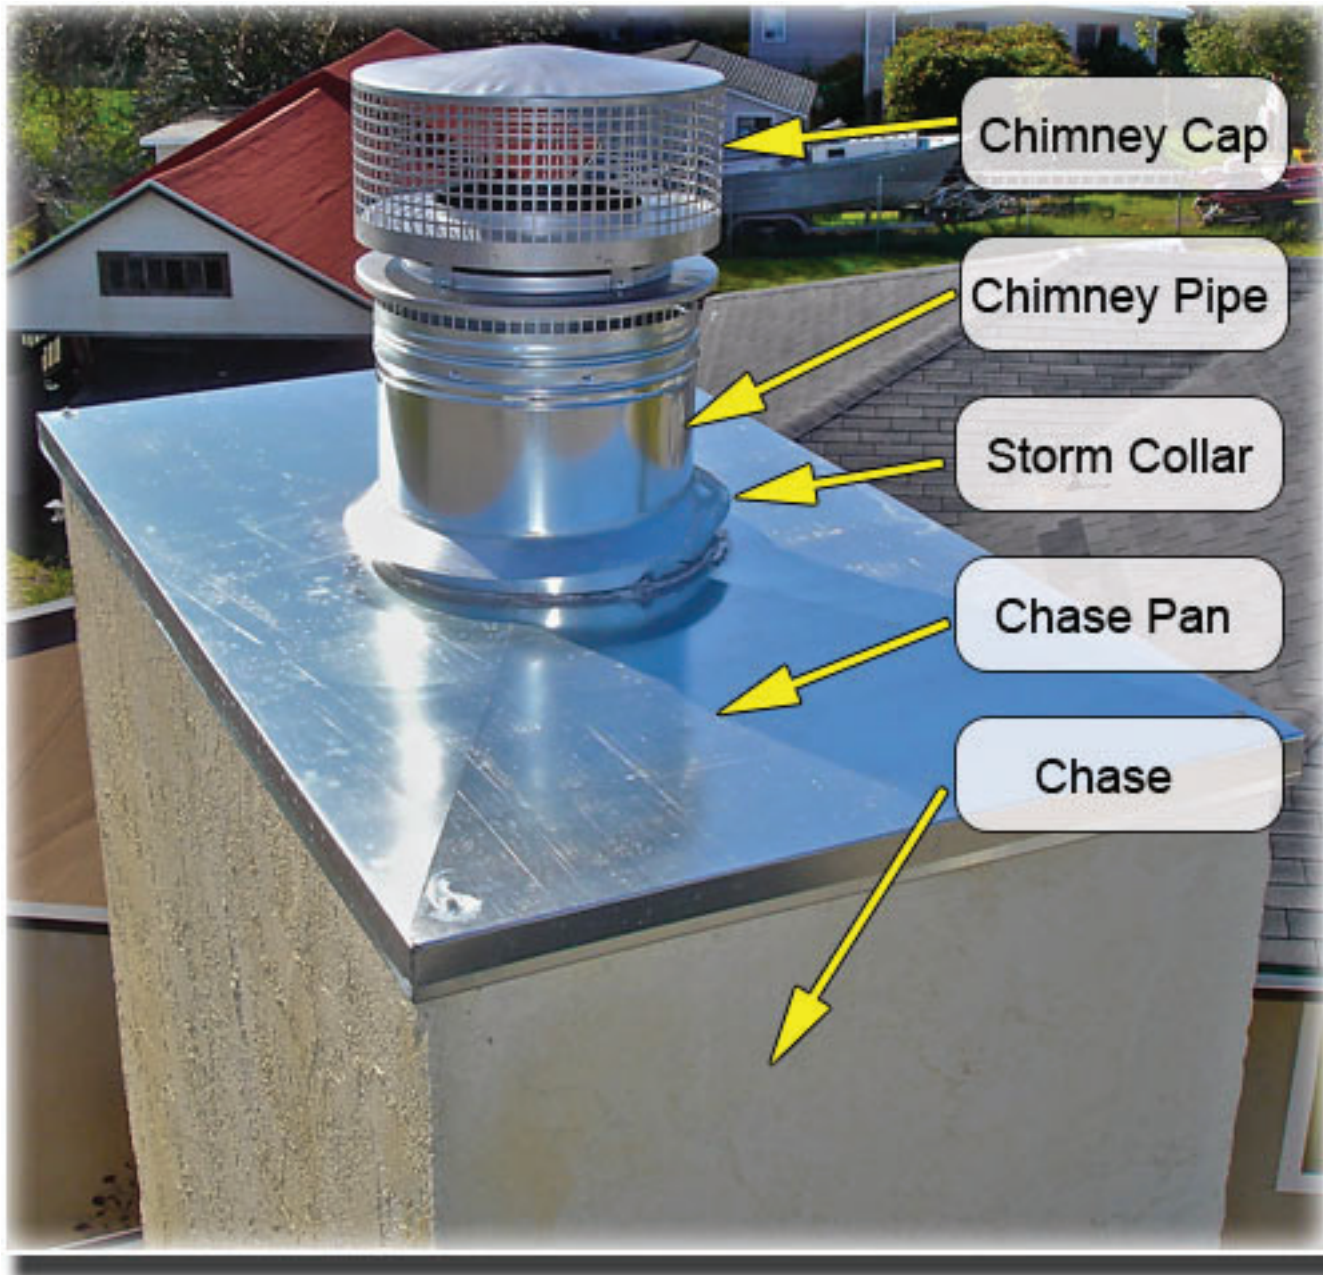

Chimney Cap

Chimney Pipe

Storm Collar

Chase Pan

Chase