

TEMPESTTM GAS TORCHES AND LANTERNS

FIRE IN MOTION

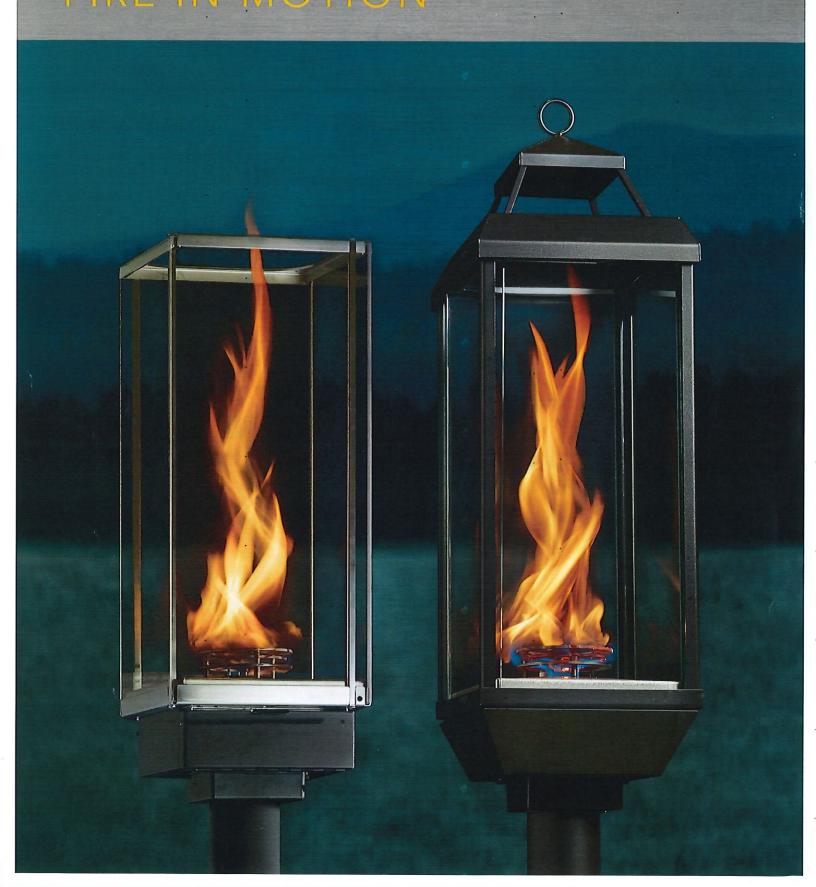

TEMPEST

GAS TORCHES AND LANTERNS

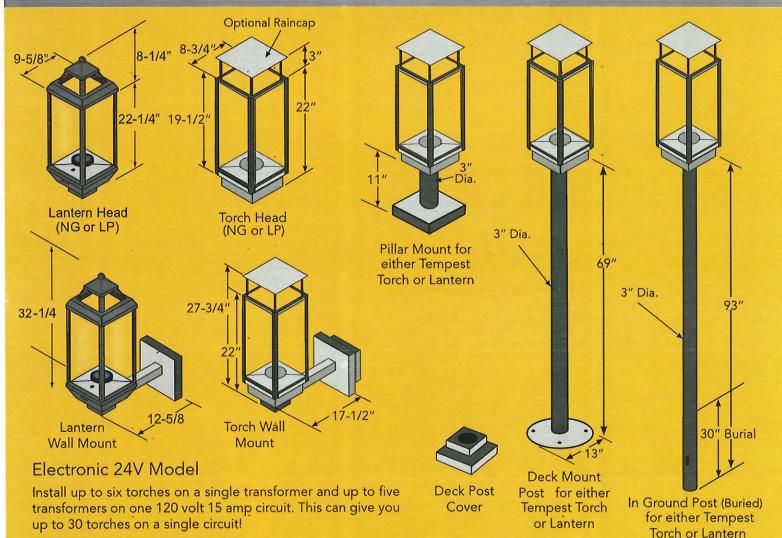

Minimum Clearances To Combustibles

Floor: 2.5" combustible floor to bottom (base) of torch

Walls: 8" measured from glass surface

<u>Ceiling:</u> 26" measured from the torch top (glass frame) with or without the raincap. (Refer to the Owner's Manual for further details)

Gas Rating	NG		LP
Btus/Hr High	20,000		20,000
Btus/Hr Low	14,000		17,000

Testing

Applicable portions of ANSI Z21.42a-2004 "Illuminating Appliances", CAN 1-2.15, CSA 4.96 U.S. (3rd Ed) "Outdoor Gas Fireplace", and AGA 8-96, "Requirement for Gas-Fired Decorative Illuminating Appliances for Outdoor Installation."



Manufactured by Travis Industries, In Mukilteo, WA

installer, service agency or the gas supplier.

FOR YOUR SAFETY:

WARNING:

FOR OUTDOOR INSTALLATION ONLY!

Do not store or use gasoline or other flammable vapors and

liquids in the vicinity of this or any other appliance.

Improper installation, adjustment, alteration, service or maintenance can cause injury or property damage. Refer to the owner's information manual provided with this appliance. For assistance or additional information consult a qualified

T. I. reserves the right to improve our products at any time without prior notification. Photos and illustrations are for descriptive purposes only. 98800075 09/2020